

YAESU MD 100 A8X E / LED

Funktechnik – Grundmann DM2CM

Western RJ 45 >>> US – rund für FT 1000MP,847,920,950,2000

- 1 - up
- 2 - 5 Volt +
- 3 - down
- 4 - fast
- 5 - gnd
- 6 - ptt
- 7 - gnd / mic
- 8 - mic


US – rund >>> Western für FT 450,817,857,897,900

- 1 - down
- 2 - up
- 3 - 5 Volt +
- 4 - gnd / mic
- 5 - mic
- 6 - ptt
- 7 - gnd
- 8 - fast

LED – rot Tx

Electretkapsel 100 – 8000 Hz

Max. 150 mV – aut, 2,5 – 12 Volt (0,3 mA + LED)

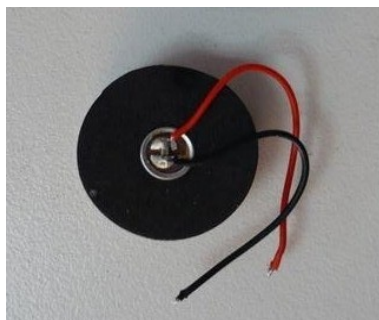

Main Filter Schalter On :

Low Cut Schalter

- 1 : - 3dB (1000 – 150 Hz)
- 2 : - 3dB (1000 – 300 Hz)

High Emphasis Schalter

On : + 6dB 3000 Hz (+ bei 2000 – 4000 Hz)

(C. 10 / 2010)